




Tính năng chính

- 0.25 ultra short throw for space-saving installation
- 2nd generation Laser Phosphor technology with up to a 30,000-hour lifespan
- 5,000 ANSI Lumens offering bright images in any environment
- Up to 170" ultra-large screen with lower cost-per-inch
- H/V keystone and 4 corner adjustment for enhanced installation flexibility



Sản phẩm Mô tả

The LS832WU is part of ViewSonic's Luminous Superior series, a lamp-free high brightness projector lineup designed for both commercial and educational spaces. This advanced 5,000 ANSI Lumens WUXGA ultra short throw laser projector is a go-to digital signage solution for public and commercial applications, such as museums, storefronts, shopping malls, and airports. The LS832WU's 0.25 ultra short throw ratio allows for a 100" screen from only 28 cm away, and the screen size can be further expanded up to 170", offering a lower cost-per-inch compared to other types of commercial displays. Adopting the 2nd generation Laser Phosphor technology, it produces consistent high brightness for up to 30,000 hours lifespan. With H/V keystone and 4 corner image adjustment, the LS832WU also offers flexible installation options. Complete with comprehensive LAN control, it enables centralized management of multiple devices and is compatible with Crestron, AMX, Extron, and PJ Link AV control systems.

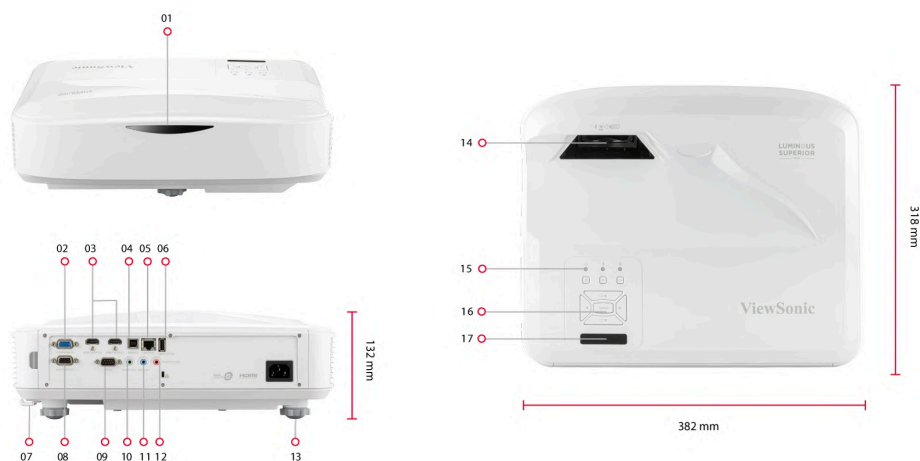

1. Front IR
2. Computer In
3. HDMI 2.0 / HDCP 2.2
4. USB-B (Service)
5. RJ45 (LAN Control)
6. USB-A (5V/1.5A)
7. Focus Switch

8. Monitor Out
9. RS232
10. Audio Out
11. Audio In
12. Microphone
13. Adjustment
14. Lens

15. LED Indicator
16. Keypad
17. Top IR

Ghé thăm Chúng tôi

www.viewsonic.com

THÔNG SỐ KỸ THUẬT

Hệ thống chiếu:	0.67" WUXGA
Độ phân giải gốc:	1920x1200
Độ sáng:	5000 (ANSI Lumens)
Brightness (Center Lumens):	6000
Độ tương phản:	3000000:1
Display Color:	1.07 Billion Colors
Loại nguồn sáng:	Laser Phosphor
Light Source Life (hours) with Normal Mode:	20000
Light Source Life (hours) with SuperEco Mode:	30000
Ống kính:	F=2.44, f=3.70mm
Chênh lệch chiếu:	133%±3%
Tỷ lệ chiếu:	0.253
Zoom quang học:	Fixed
Zoom kỹ thuật số:	0.8x-2.0x
Kích cỡ hình:	80"- 170"
Khoảng cách chiếu:	0.17-0.66m (100"@0.28m)
Keystone:	H: +/-10° , V: +/-10°
Tiếng ồn có thể nghe được (Normal):	34dB
Audible Noise (Eco):	28dB
Độ trễ đầu vào:	33.2ms
Hỗ trợ độ phân giải:	VGA(640 x 480) to 4K(3840 x 2160)
Tương thích HDTV:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160p
Tần số ngang:	15K- 91KHz
Tốc độ quét dọc:	24- 85Hz

ĐẦU VÀO

Máy tính trong (kết nối với linh kiện):	1
HDMI:	2 (HDMI 2.0/ HDCP 1.4/2.2)
Đầu vào âm thanh (3,5 mm):	1
Micrô trong:	1

ĐẦU RA

Giám sát:	1
Audio-out (3.5mm):	1
Loa:	10W x1
USB Type A (Nguồn):	1 (5V/1.5A)

ĐIỀU KHIỂN

RS232 (DB male 9 chân):	1
RJ45 (LAN control):	1
USB Type B (Services):	1

KHÁC

Điện áp cung cấp:	100-240V+/- 10%, 50/60Hz (AC in)
Tiêu thụ năng lượng:	Normal: 328W Standby: <0.5W
Nhiệt độ hoạt động:	5~40°C
Carton:	Brown
Khối lượng tịnh:	5.8kg
Gross Weight:	8.1kg
Kích thước (WxDxH) với chân điều chỉnh:	382x318x132mm
Packing Dimensions:	518x420x313mm
Ngôn ngữ OSD:	English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Swedish, Norwegian, Finnish, Greek, T Chinese, S Chinese, Japanese, Korean, Russian, Hungarian Czech, Arabic, Thai, Turkish, Farsi, Vietnam, Indonesian, Romania, Slovakian (27 language)
User Guide Language:	English, S-Chinese, T-Chinese, Indonesian, Finish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Arabic, Czech, Thai, Vietnamese, total 20 languages

STANDARD ACCESSORY

Dây nguồn:	1
Điều khiển từ xa:	1
QSG:	Yes
Warranty Card:	Yes (CN Only)

PHỤ KIỆN TỰY CHỌN

Wall/Ceiling Mount:	PJ-WMK-304 PJ-WMK-007
---------------------	--------------------------